


Nordplant

Nordplant ready-to-run modular installations. Versatile crushing and screening modules with Metso brand equipment guaranteed to minimize lead times and maximize operation production. Ranging from 50 to 350 t/h, Metso's Nordplant solution is ideal for cost-effective production and easy reconfiguration to grow with your production demands.

Nordplant selection chart

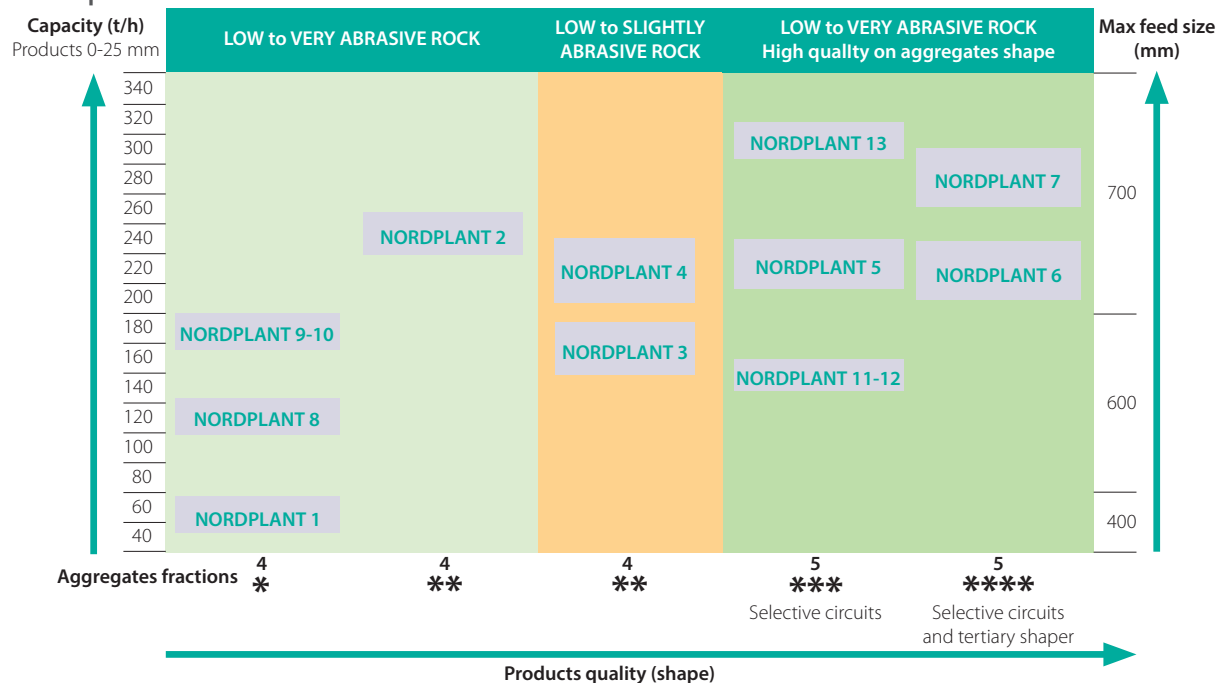

Nordplant technical data

Nordplant model	Application	Max feed size	Crushing stages	Configuration	Different aggregate size fractions or 0-D product	Products quality (shape)	Production data	
							From hard to soft rock Feed products t/h	End products 0-25 mm, t/h
1	Low to abrasive rock	400	2	Jaw/Cone	4	+	80-100	65-70
8		600	2	Jaw/Cone	4	+	150-170	130-140
9		600	2	Jaw/Cone	4	+	220-240	190-200
10		700	2	Jaw/Cone	4	+	220-240	190-200
2	Low to very abrasive rock High quality aggregates shape	700	3	Jaw/N° 2 Cone	4	++	280-320	240-260
11		600	3	Jaw/N° 2 Cone	5	+++	170-200	150-170
12		700	3	Jaw/N° 2 Cone	5	+++	170-200	150-170
5		700	3	Jaw/N° 2 Cone	5	+++	260-310	220-250
13		700	3	Jaw/N° 2 Cone	5	+++	320-390	280-320
6		700	3	Jaw/Cone/Vertical	5	++++	240-320	210-250
7		700	3	Jaw/Cone/Vertical	5	++++	310-380	270-310
3	Low to slightly abrasive rock	600	2	Jaw/Impact	4	++	180-230	160-195
4		700	2	Jaw/Impact	4	++	250-320	210-250

For more information, contact your local Metso representative.
 Carlos Padin, +33 6 0727 2002, carlos.padin@metso.com, www.metso.com


Specifications in this document are subject to change without notice.
 Product names in this publication are all trademarks of Metso Corporation.



Nordplant predesigned modules

Example of one of our pre-designed modules.

Primary crushing modules		
C Crushers	Hopper	Feeder
C 80	15 m ³	TK8-32-2V
C 100	26 m ³	TK11-42-2V
C 120	26 m ³	TK11-42-2V

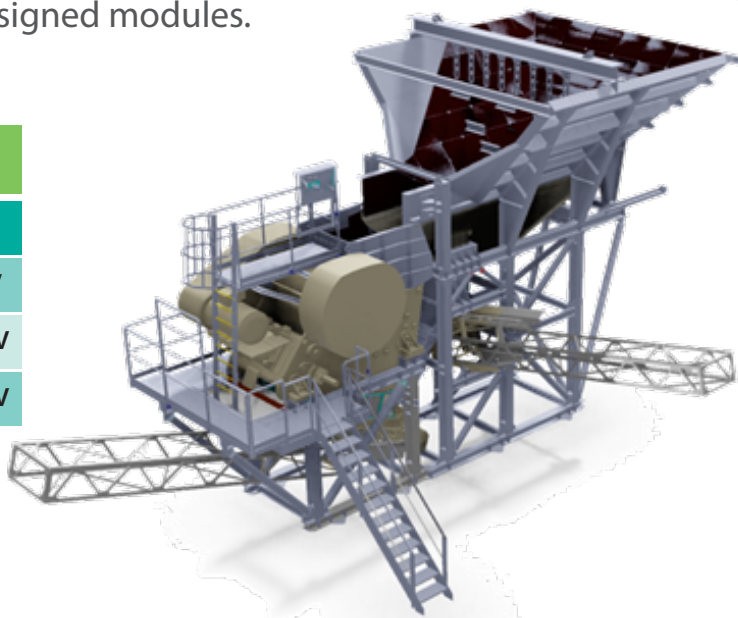

Example of a Nordplant 11 layout.

